

COMBINATION JACK

CXLF SERIES

Combination jack with 3 poles XLR socket + 1/4" phone jack




Features

- Fine forming and treatment for safety contact with the construction of locking or non-locking XLR socket
- Good insulation with glass filled thermoplastics
- Space and labor saving design

Applications

- Applicable to all types of electronic music instruments like as mixing console, graphic equalizer and stereo amplifier etc.

Dimensions

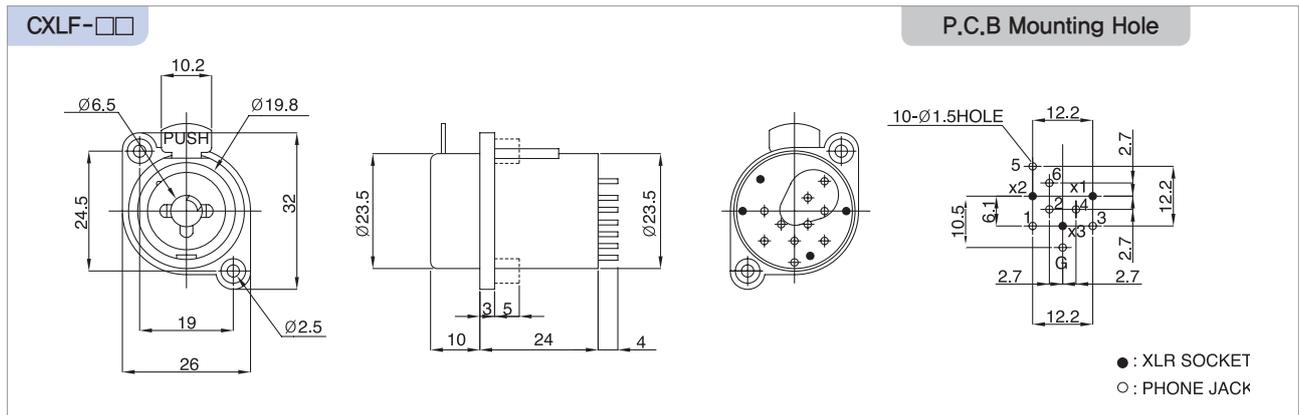

CXLF Series

MODEL NO.	CXLF-07	CXLF-06	CXLF-05	CXLF-04	CXLF-03	CXLF-02	CXLF-01
SCHEMATIC CIRCUIT WITHOUT XLR SOCKET CIRCUITS							

General Specification

- Electrical life : 10,000 cycles min.
- Contact Resistance : 20 mohms max.
- Contact Rating : 10A, 48V DC
- Capacitance : XLR ≤ 3pF, JACK ≤ 5pF
- Insulation Resistance : Over 100 Mohms
- Dielectric Withstanding Voltage : 500V AC
- Insertion / Withdrawal Force : 1~5 kgf · cm
- Operating Temperature : -20° ~ +60°C